
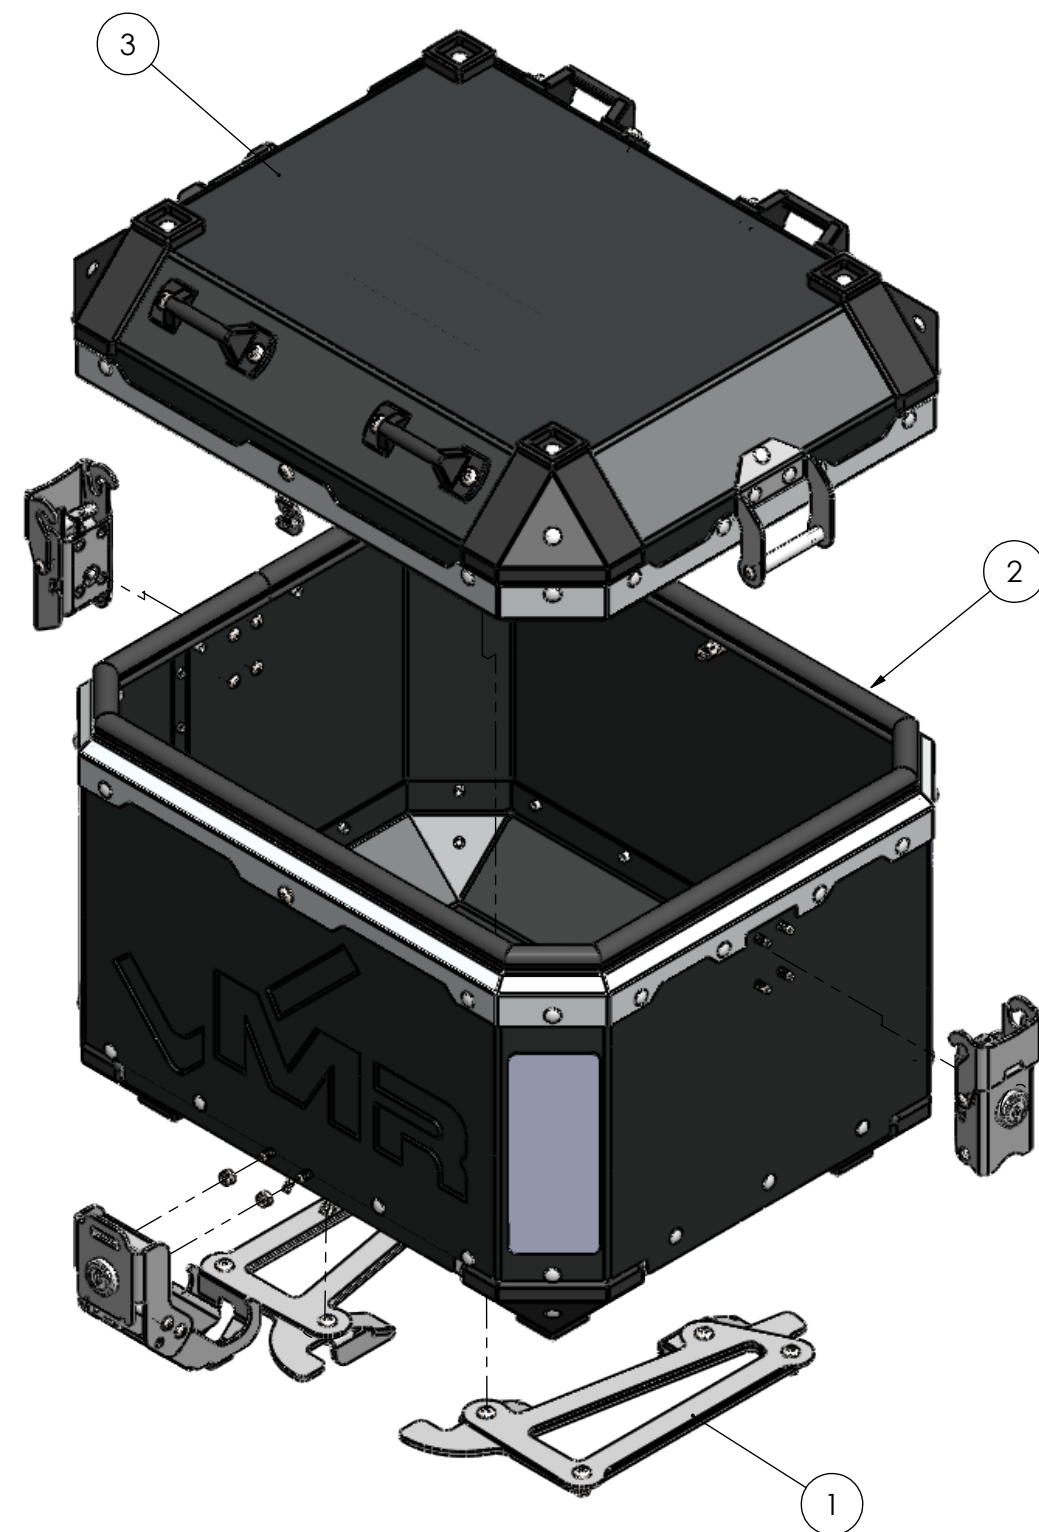






1		2	3
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	A110507	BMW Top Box Plate Assy	1
2	A11081002	Top Box K51 - Natural	1
3	A11081003	Top Box Lid - Natural	1
4	WFST-D985SS-M04	NUT Hex Nyloc M04 X 0.70mm SS	2
5	WFST-D985SS-M05	NUT Hex Nyloc M05 X 0.80mm SS	4
6	WFST-I7089SS-M05	Flat Washer SS - M05 - 10x05.5	4
7	WFST-I7380SS-M04x10	Socket Button Head Cap Screw-SS-M04x10	11
8	WFST-I7380SS-M04x12	Socket Button Head Cap Screw-SS-M04x12	2
9	WFST-I7380SS-M05x20	Socket Button Head Cap Screw-SS-M05x20	2
10	WPLA-DST-1190	MR Sticker 130x49mm	4
11	WPLA-DST-1195	MR Info Sticker 106x47	1
12	A110013	Latch Mini Cam Lock	2
13	A120014	Frame Latch Mini Cam Lock	1

C	Process	Time (Min)
	Laser Cut	
	Bending	
	Welding TIG	30
D	Powdercoating - Black Ferrograin-Vx8503 (Box & Lid)	
	Powdercoating - Silver Ferrograin-Vx95154 (Rims)	
	Shaking	30
	Parts Picking	30
	Assembly	60
	Packaging	15

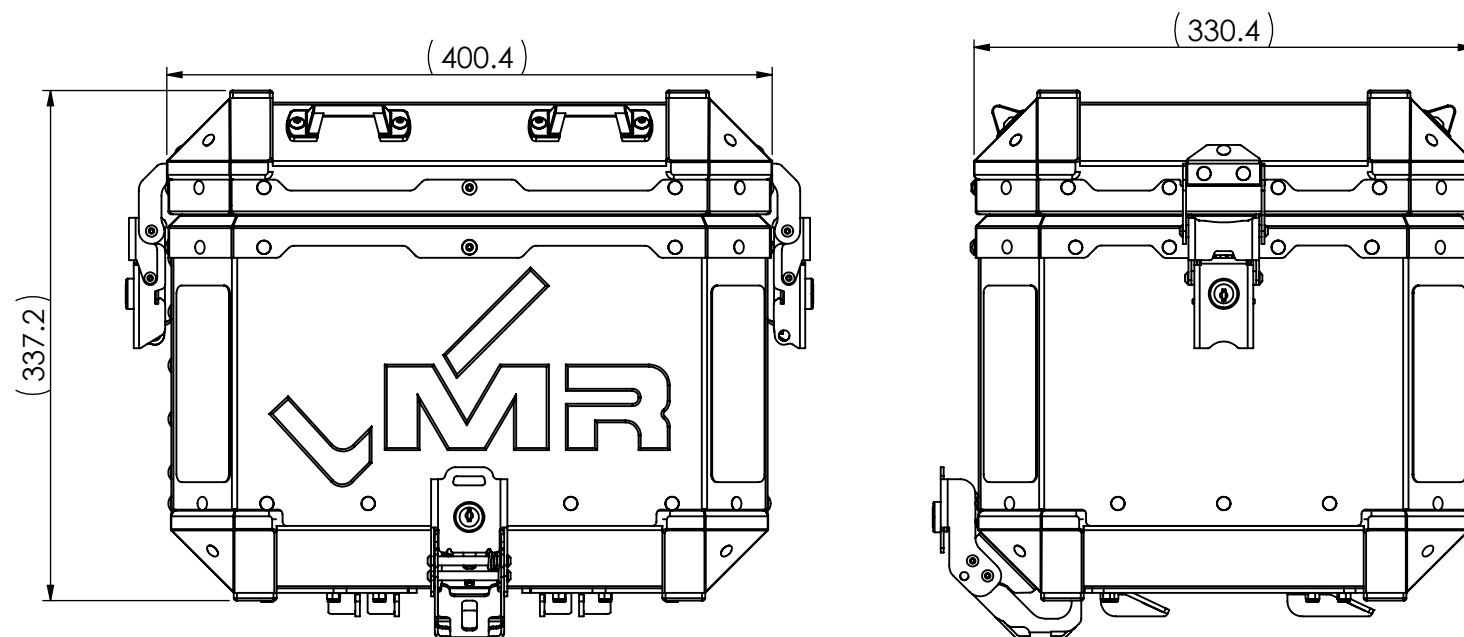


B	ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	A110811	B	
													DESCRIPTION:	Top Box K51 - Natural		
	MACHINING TOLERANCE		GENERAL TOLERANCE										DWG No.	A110811		
	ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE		ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM										DATE PRINTED:	12/05/2025		
	0.5 UP TO 3 ± 0.05	120 UP TO 400 ± 0.2	0.5 UP TO 3 ± 0.1	120 UP TO 400 ± 0.5									SHEET	1 # 14		
	3 UP TO 6 ± 0.05	400 UP TO 1000 ± 0.3	3 UP TO 6 ± 0.1	400 UP TO 1000 ± 0.8									REV	D		
	6 UP TO 30 ± 0.1	1000 UP TO 2000 ± 0.5	6 UP TO 30 ± 0.2	1000 UP TO 2000 ± 1.2									SURFACE TREATMENT:			
	30 UP TO 120 ± 0.15	2000 UP TO 4000 ± 1.0	30 UP TO 120 ± 0.3	2000 UP TO 4000 ± 2.0												
	ANGULAR DIMENSIONS		ANGULAR DIMENSIONS													
	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'												
A	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'											A	
	50° UP TO 120° ± 0°20'		50° UP TO 120° ± 0°20'													
	☐ STRAIGHTNESS	☐ CIRCULARITY	☐ PROFILE OF ANY LINE	☐ POSITION	☐ CIRCULAR RUN-OUT	☐ LEAST MATERIAL CONDITION	3 PROJECTION METHOD: RD ANGLE THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES PTY Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.				SCALE:	1:5				Outlast Adventure
	☐ FLATNESS	☐ CYLINDRICITY	☐ PROFILE OF ANY SURFACE	☐ CONCENTRICITY	☐ TOTAL RUN-OUT	☐ MAXIMUM MATERIAL CONDITION					FINISH:		MATERIAL:			
	☐ PARALLELISM	☐ PERPENDICULARITY	☐ ANGULARITY	☐ SYMMETRY	☐ ENVELOPE PRINCIPLE	☐ PROJECTED TOLERANCE ZONE					P/C Satin Black (60-80)		N/A			

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	STOCK SIZE	QTY.
1	A110006	Lid Belt Strap Hook	N/A		4
2	A110017	Lide Side Latch			2
3	A11081005	Top Box Lid Rim	N/A		1
4	P110810005	Top Box Lid Plate	ALU1200H4	1.6	1
5	P110810006	Lid Cable Mount Fixed	SS304	2	2
6	P110810007	Lid Cable Mount Removable	SS304	2	2
7	WELE-CON-CRI-1155	Cable Ferrule Ø6.0x15.0mm	Stainless Steel		4
8	WFST-D6791AL-4.8x08.0	Semi Tubular O/H Rivet 4.8x8.0mm Alu	ALU1200H4		30
9	WFST-I7089SS-M05	Flat Washer SS - M05 - 10x05.5			10
10	WFST-I7380SS-M05x12	Socket Button Head Cap Screw-SS-M05x12			8
11	WFST-I7380SS-M05x20	Socket Button Head Cap Screw-SS-M05x20			2
12	WPLA-INS-1265	Pannier Lid Wire Rope 1.6mm	Stainless Steel	1.6mm - 7x7	2
13	WPLA-MOU-1180	Panier Corner Mould			4
14	WFST-D986SS-M05	NUT Hex Nyloc M05 X 0.80mm 316SS			8

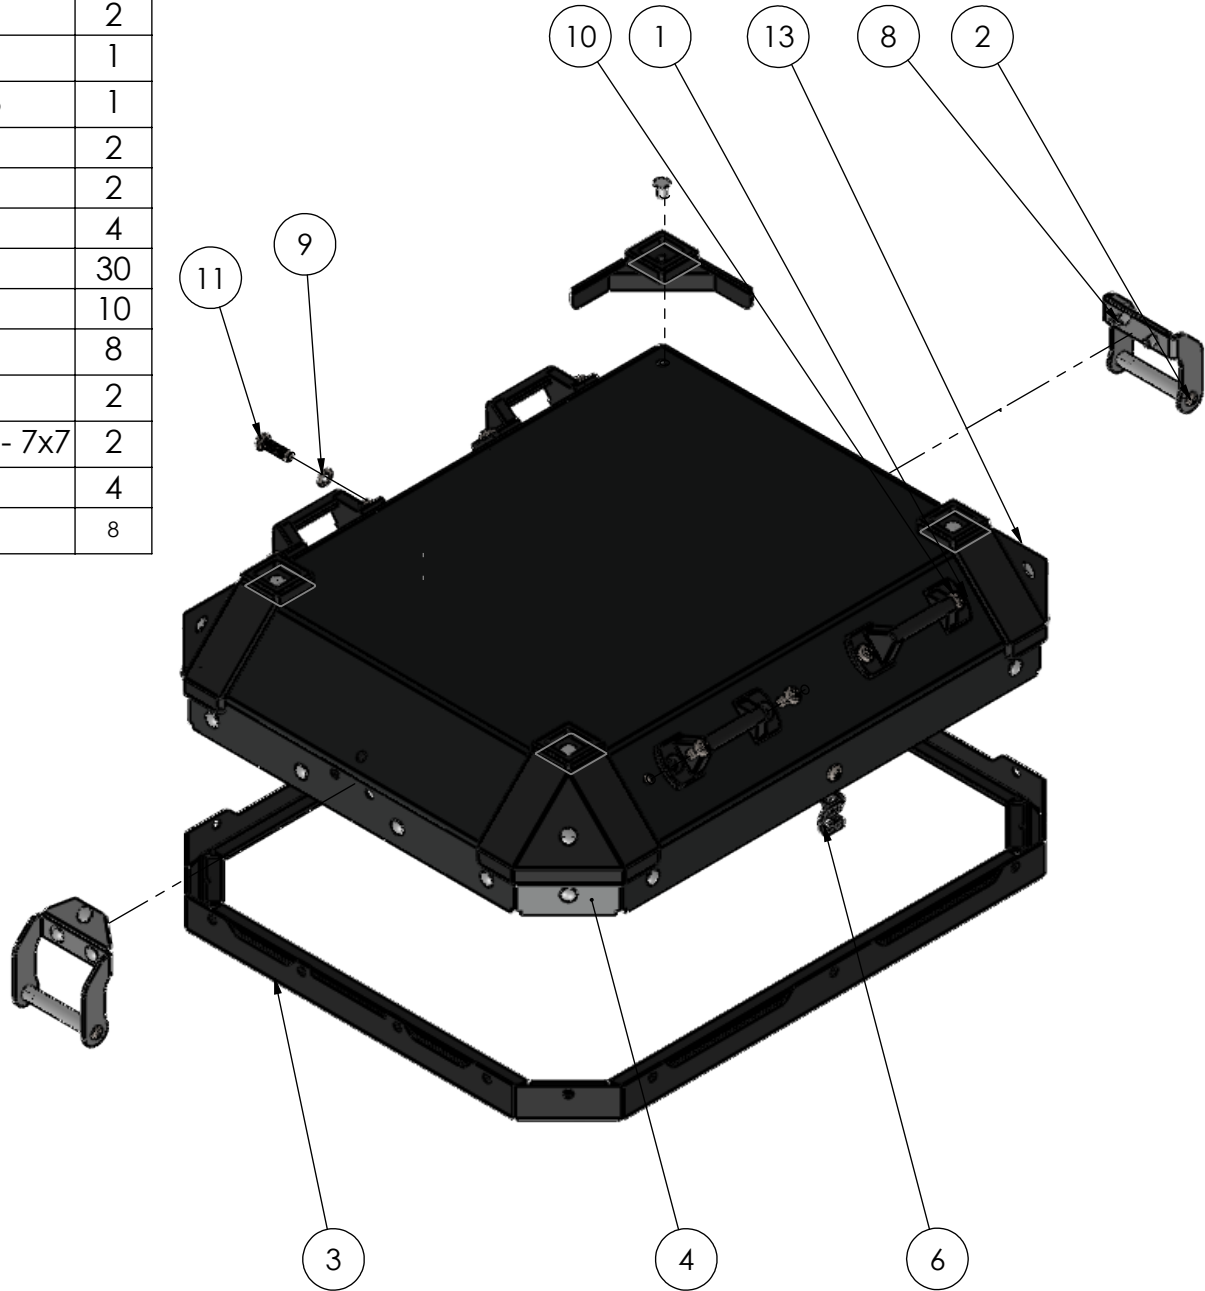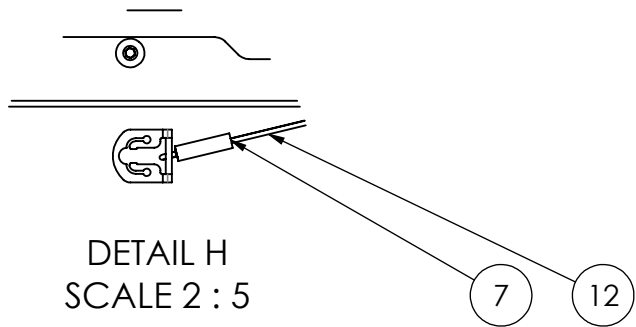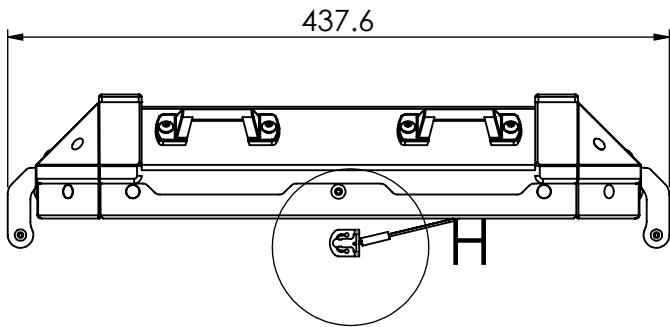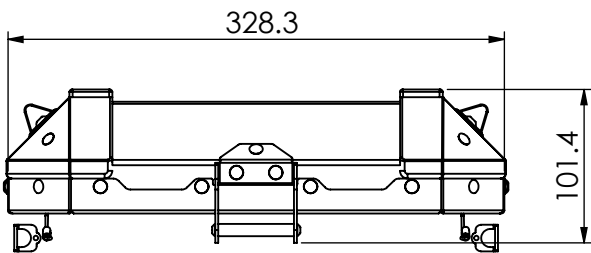



ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.						REV	Detail of REV	Date:	Name:	Name:	Signature:	Date:	FILE NAME:	A11081003					
													DESCRIPTION:	Top Box Lid - Natural					
MACHINING TOLERANCE			GENERAL TOLERANCE																
ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE						ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM								DWG No.	A11081003				
0.5 UP TO 3 ± 0.05		120 UP TO 400 ± 0.2		0.5 UP TO 3 ± 0.1		120 UP TO 400 ± 0.5								DATE PRINTED:	12/05/2025				
3 UP TO 6 ± 0.05		400 UP TO 1000 ± 0.3		3 UP TO 6 ± 0.1		400 UP TO 1000 ± 0.8								SHEET	3 # 14				
6 UP TO 30 ± 0.1		1000 UP TO 2000 ± 0.5		6 UP TO 30 ± 0.2		1000 UP TO 2000 ± 1.2								REV	H				
30 UP TO 120 ± 0.15		2000 UP TO 4000 ± 1.0		30 UP TO 120 ± 0.3		2000 UP TO 4000 ± 2.0								SURFACE TREATMENT:					
ANGULAR DIMENSIONS						ANGULAR DIMENSIONS													
UP TO 10° ± 1°		120° UP TO 400° ± 0°10'		UP TO 10° ± 1°		120° UP TO 400° ± 0°10'													
10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'		10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'													
50° UP TO 120° ± 0°20'				50° UP TO 120° ± 0°20'															
— STRAIGHTNESS ○ CIRCULARITY ⌒ PROFILE OF ANY LINE ⊕ POSITION ↺ CIRCULAR RUN-OUT ⓪ LEAST MATERIAL CONDITION ▭ FLATNESS ⊘ CYLINDRICITY ⌒ PROFILE OF ANY SURFACE ◎ CONCENTRICITY ↺ TOTAL RUN-OUT Ⓜ MAXIMUM MATERIAL CONDITION ∥ PARALLELISM ⊥ PERPENDICULARITY ∠ ANGULARITY ≡ SYMMETRY ⓔ ENVELOPE PRINCIPLE Ⓟ PROJECTED TOLERANCE ZONE						THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.				3 PROJECTION METHOD: RD ANGLE		SCALE: 1:5		FINISH:		MATERIAL: N/A		</	


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	P110810004	Top Box Lid Rim	2

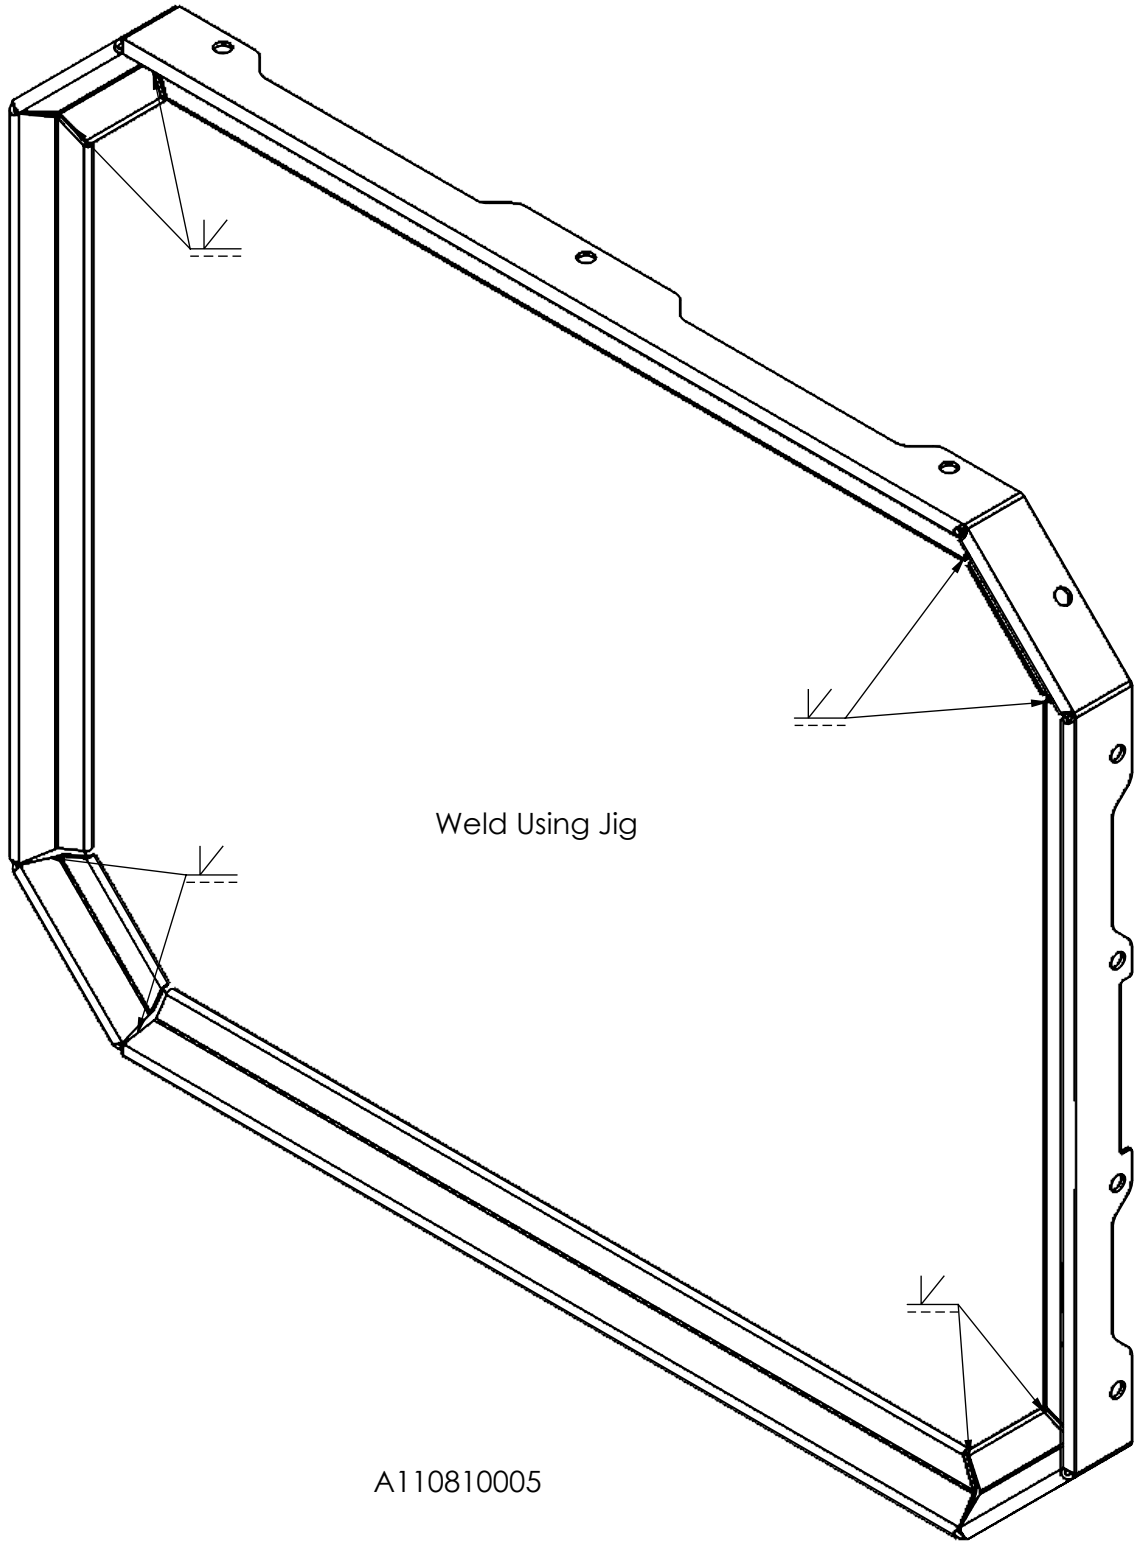






ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	A110811		
								DRAWN:				DESCRIPTION:	Top Box K51 - Natural		
MACHINING TOLERANCE		GENERAL TOLERANCE						CHECKED:				DWG No.	A110811		
ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE								APPROVED:				DATE PRINTED:	12/05/2025		
0.5 UP TO 3 ± 0.05		120 UP TO 400 ± 0.2		0.5 UP TO 3 ± 0.1		120 UP TO 400 ± 0.5						SHEET	4 # 14		
3 UP TO 6 ± 0.05		400 UP TO 1000 ± 0.3		3 UP TO 6 ± 0.1		400 UP TO 1000 ± 0.8						REV	D		
6 UP TO 30 ± 0.1		1000 UP TO 2000 ± 0.5		6 UP TO 30 ± 0.2		1000 UP TO 2000 ± 1.2						SURFACE TREATMENT:			
30 UP TO 120 ± 0.15		2000 UP TO 4000 ± 1.0		30 UP TO 120 ± 0.3		2000 UP TO 4000 ± 2.0									
ANGULAR DIMENSIONS				ANGULAR DIMENSIONS											
UP TO 10° ± 1°		120° UP TO 400° ± 0°10'		UP TO 10° ± 1°		120° UP TO 400° ± 0°10'									
10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'		10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'									
50° UP TO 120° ± 0°20'				50° UP TO 120° ± 0°20'											
STRAIGHTNESS	CIRCULARITY	PROFILE OF ANY LINE	POSITION	CIRCULAR RUN-OUT	LEAST MATERIAL CONDITION	THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.		3 PROJECTION METHOD: RD ANGLE		SCALE: 1:5		FINISH: P/C Satin Black (60-80)A MATERIAL: N/A		Outlast Adventure	
FLATNESS	CYLINDRICITY	PROFILE OF ANY SURFACE	CONCENTRICITY	TOTAL RUN-OUT	MAXIMUM MATERIAL CONDITION										
PARALLELISM	PERPENDICULARITY	ANGULARITY	SYMMETRY	ENVELOPE PRINCIPLE	PROJECTED TOLERANCE ZONE										

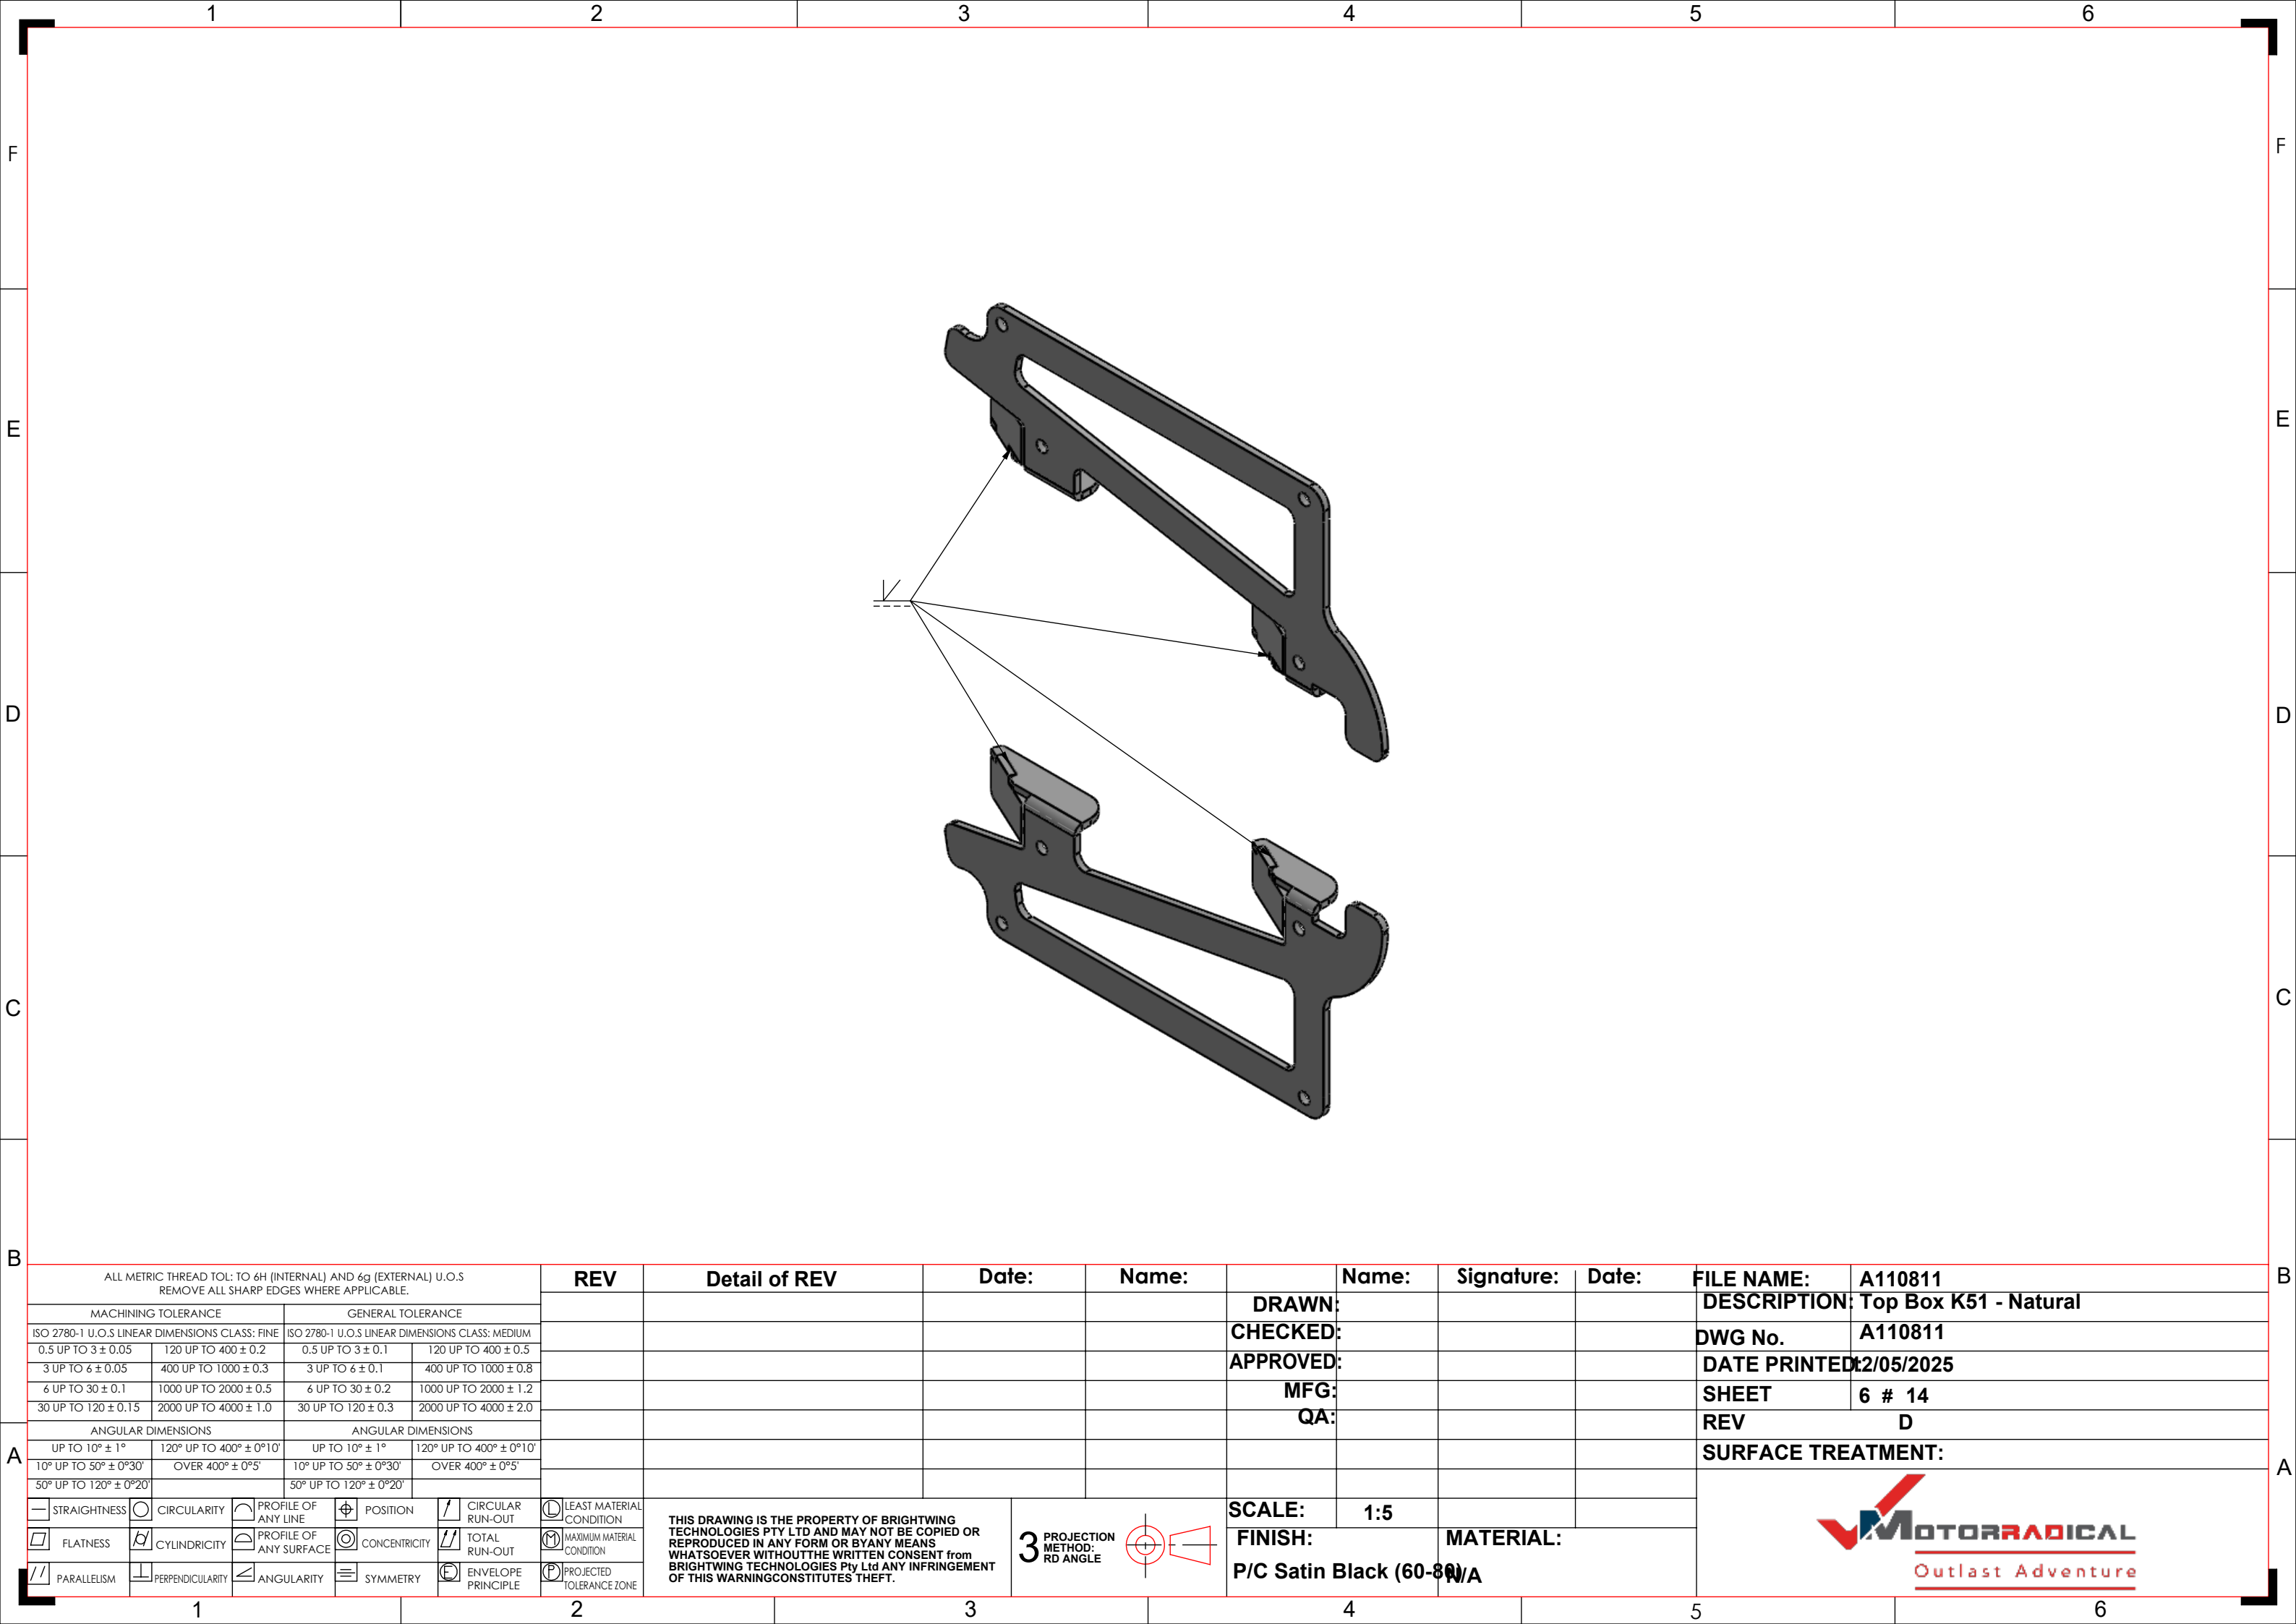




ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.										REV	Detail of REV	Date:	Name:	Name:	Signature:	Date:	FILE NAME:	A110811					
MACHINING TOLERANCE										GENERAL TOLERANCE										DESCRIPTION:	Top Box K51 - Natural		
ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE										ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM										DWG No.	A110811		
0.5 UP TO 3 ± 0.05		120 UP TO 400 ± 0.2		0.5 UP TO 3 ± 0.1		120 UP TO 400 ± 0.5														DATE PRINTED:	12/05/2025		
3 UP TO 6 ± 0.05		400 UP TO 1000 ± 0.3		3 UP TO 6 ± 0.1		400 UP TO 1000 ± 0.8														SHEET	6 # 14		
6 UP TO 30 ± 0.1		1000 UP TO 2000 ± 0.5		6 UP TO 30 ± 0.2		1000 UP TO 2000 ± 1.2														REV	D		
30 UP TO 120 ± 0.15		2000 UP TO 4000 ± 1.0		30 UP TO 120 ± 0.3		2000 UP TO 4000 ± 2.0														SURFACE TREATMENT:			
ANGULAR DIMENSIONS										ANGULAR DIMENSIONS										 Outlast Adventure			
UP TO 10° ± 1°		120° UP TO 400° ± 0°10'		UP TO 10° ± 1°		120° UP TO 400° ± 0°10'																	
10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'		10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'																	
50° UP TO 120° ± 0°20'				50° UP TO 120° ± 0°20'																			
☐ STRAIGHTNESS	☐ CIRCULARITY	☐ PROFILE OF ANY LINE	☐ POSITION	☐ CIRCULAR RUN-OUT	☐ LEAST MATERIAL CONDITION	3 PROJECTION METHOD: RD ANGLE 						SCALE:	1:5		MATERIAL:								
☐ FLATNESS	☐ CYLINDRICITY	☐ PROFILE OF ANY SURFACE	☐ CONCENTRICITY	☐ TOTAL RUN-OUT	☐ MAXIMUM MATERIAL CONDITION							FINISH:											
☐ PARALLELISM	☐ PERPENDICULARITY	☐ ANGULARITY	☐ SYMMETRY	☐ ENVELOPE PRINCIPLE	☐ PROJECTED TOLERANCE ZONE							P/C Satin Black (60-80)A											
THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.																							

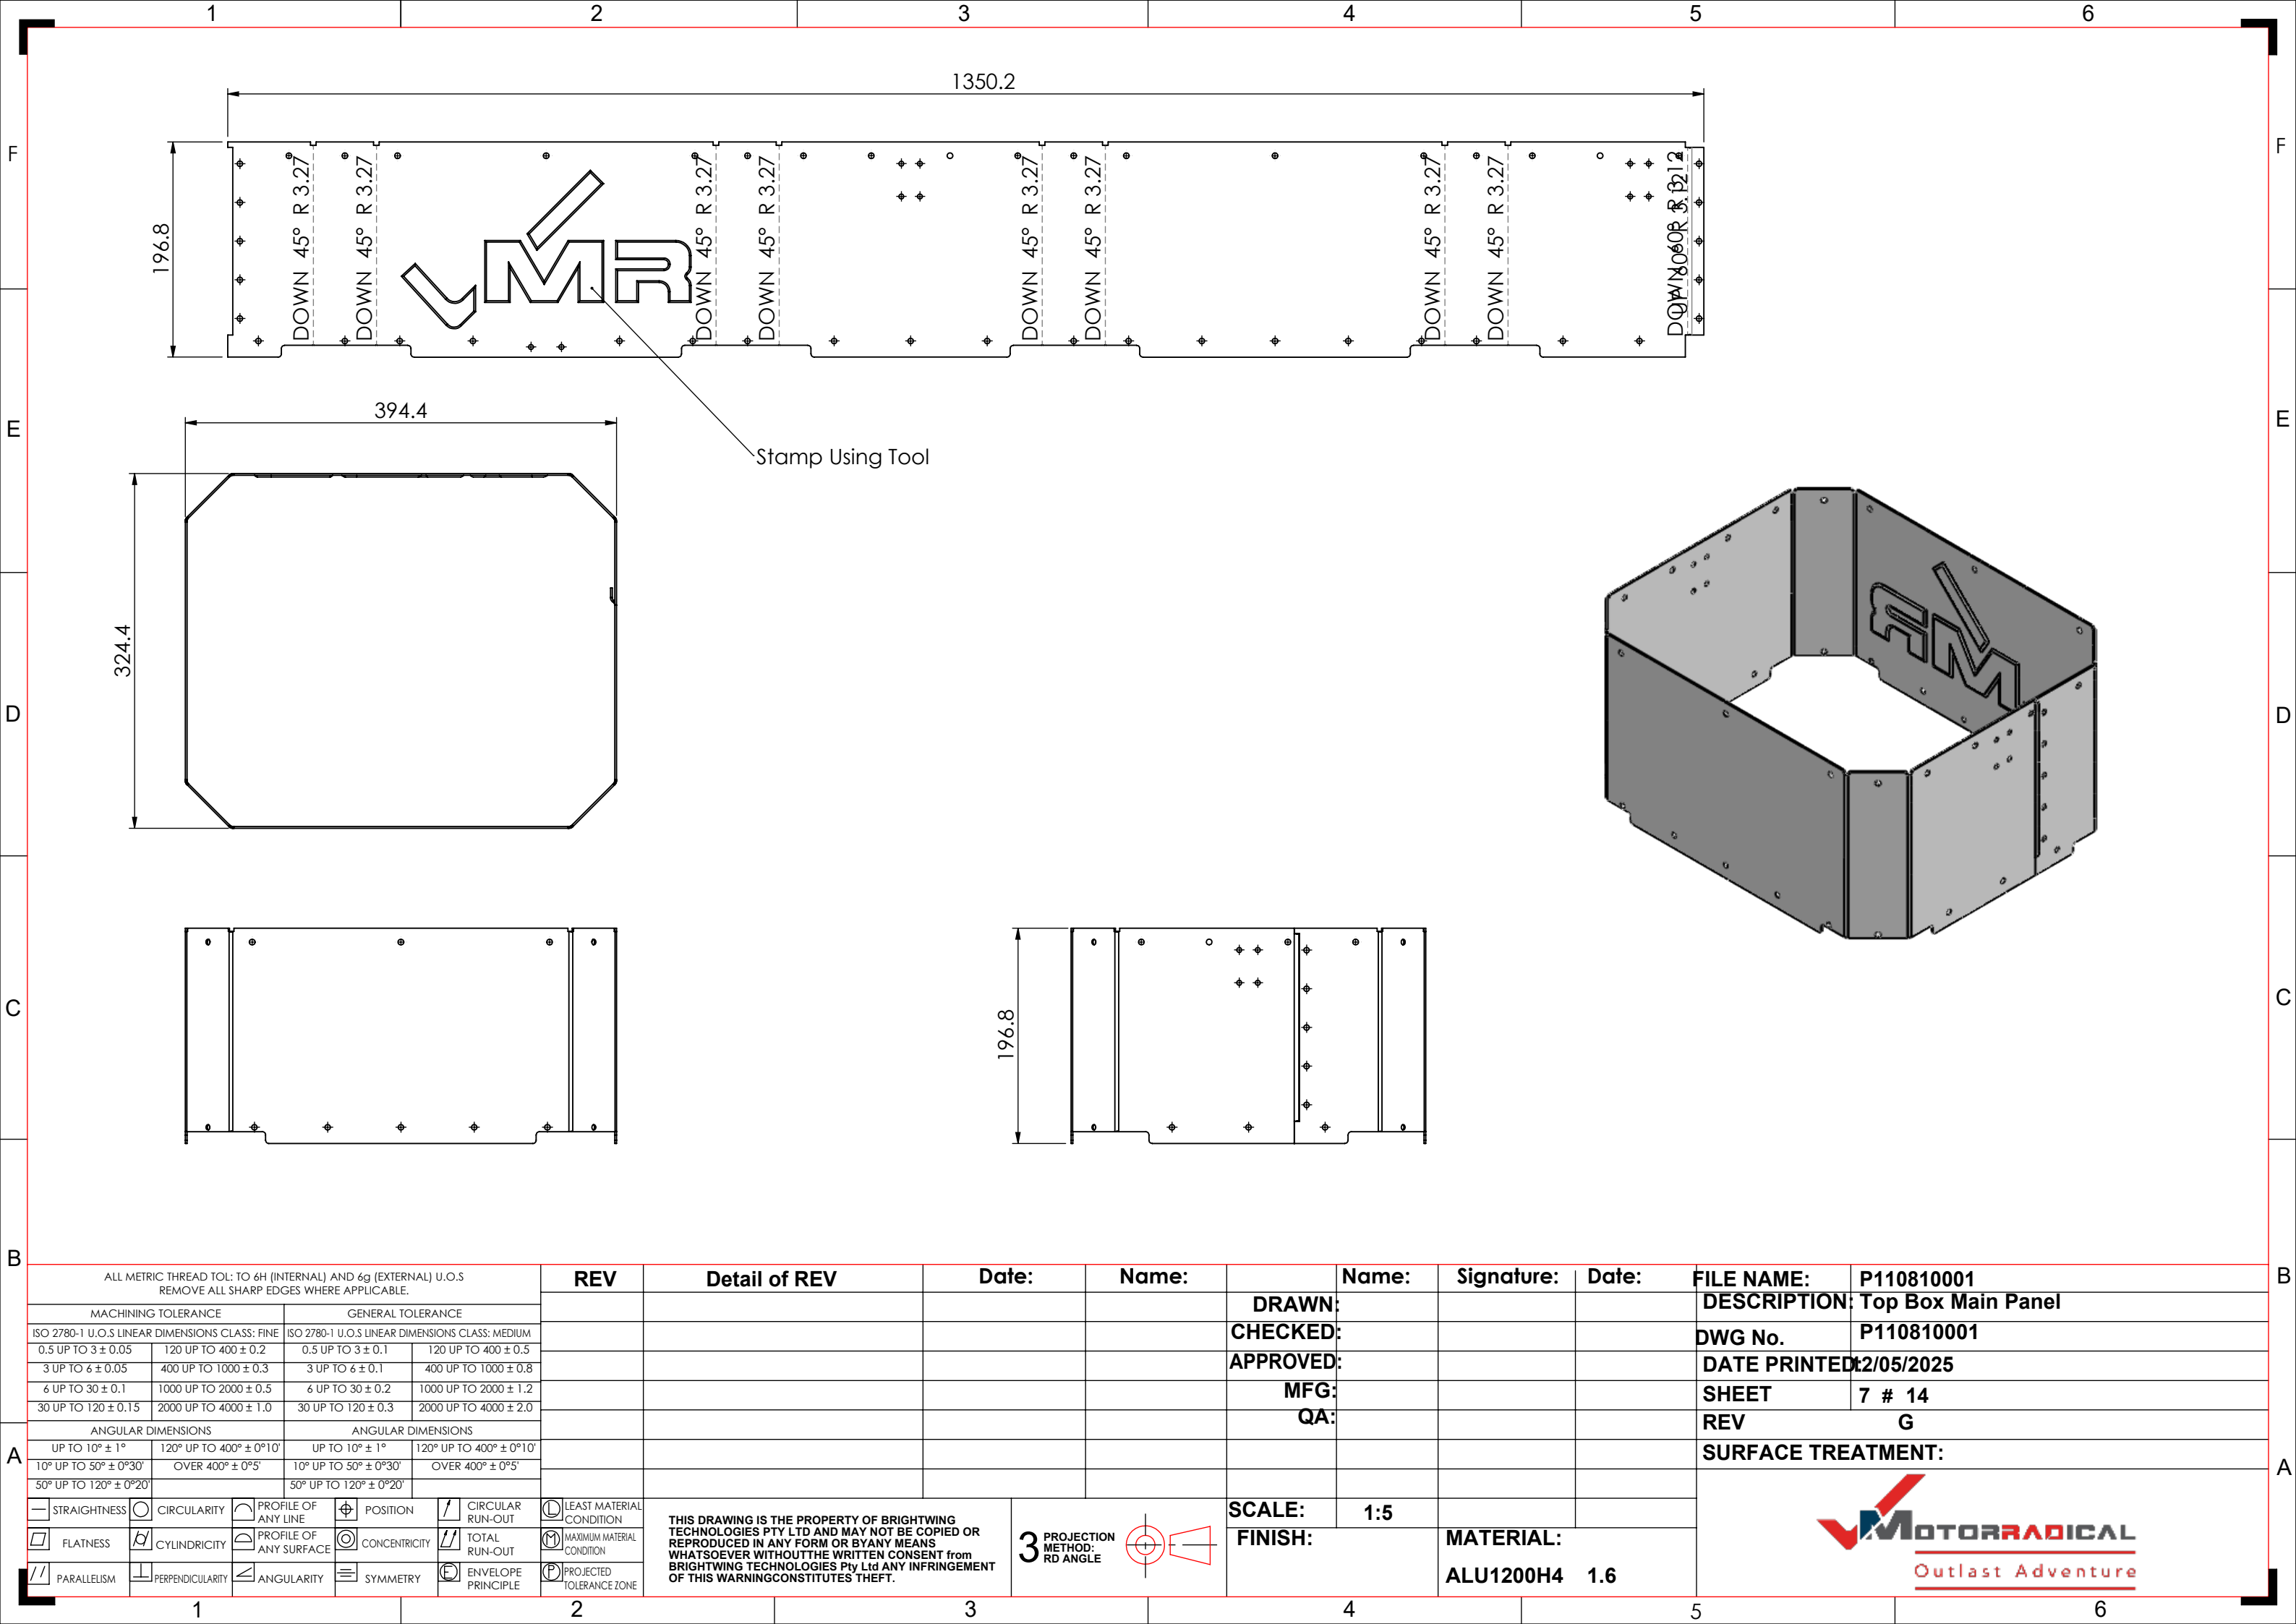


ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:	Name:	Signature:	Date:	FILE NAME:	P110810001
MACHINING TOLERANCE				GENERAL TOLERANCE				DRAWN:		DESCRIPTION:		Top Box Main Panel
ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE				ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM				CHECKED:		DWG No.		P110810001
0.5 UP TO 3 ± 0.05		120 UP TO 400 ± 0.2		0.5 UP TO 3 ± 0.1		120 UP TO 400 ± 0.5		APPROVED:		DATE PRINTED:		12/05/2025
3 UP TO 6 ± 0.05		400 UP TO 1000 ± 0.3		3 UP TO 6 ± 0.1		400 UP TO 1000 ± 0.8		MFG:		SHEET		7 # 14
6 UP TO 30 ± 0.1		1000 UP TO 2000 ± 0.5		6 UP TO 30 ± 0.2		1000 UP TO 2000 ± 1.2		QA:		REV		G
30 UP TO 120 ± 0.15		2000 UP TO 4000 ± 1.0		30 UP TO 120 ± 0.3		2000 UP TO 4000 ± 2.0				SURFACE TREATMENT:		
ANGULAR DIMENSIONS				ANGULAR DIMENSIONS								
UP TO 10° ± 1°		120° UP TO 400° ± 0°10'		UP TO 10° ± 1°		120° UP TO 400° ± 0°10'						
10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'		10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'						
50° UP TO 120° ± 0°20'				50° UP TO 120° ± 0°20'								
— STRAIGHTNESS	○ CIRCULARITY	⌒ PROFILE OF ANY LINE	⊕ POSITION	⌒ CIRCULAR RUN-OUT	Ⓛ LEAST MATERIAL CONDITION	THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES PTY LTD ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.		3 PROJECTION METHOD: RD ANGLE		SCALE:	1:5	 Outlast Adventure
▭ FLATNESS	⌒ CYLINDRICITY	⌒ PROFILE OF ANY SURFACE	⊗ CONCENTRICITY	⌒ TOTAL RUN-OUT	Ⓜ MAXIMUM MATERIAL CONDITION					FINISH:	MATERIAL:	
∥ PARALLELISM	⊥ PERPENDICULARITY	⌒ ANGULARITY	≡ SYMMETRY	Ⓢ ENVELOPE PRINCIPLE	Ⓟ PROJECTED TOLERANCE ZONE					ALU1200H4 1.6		

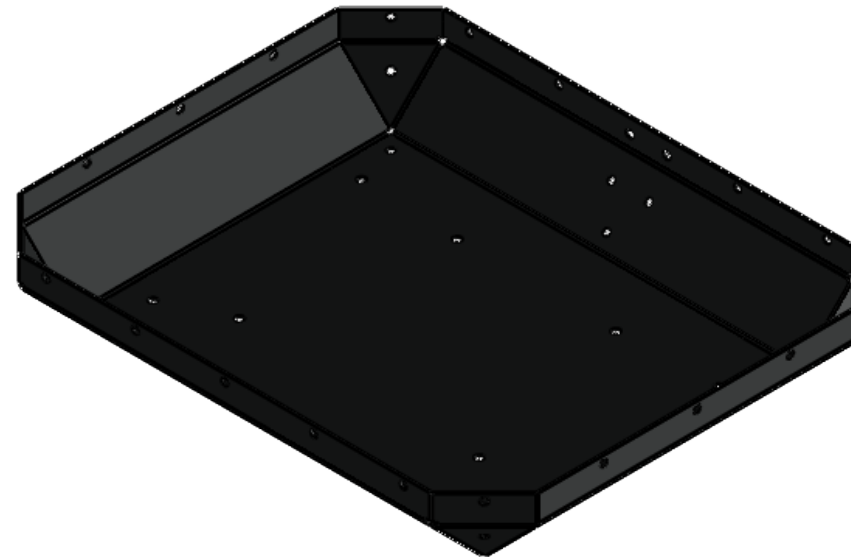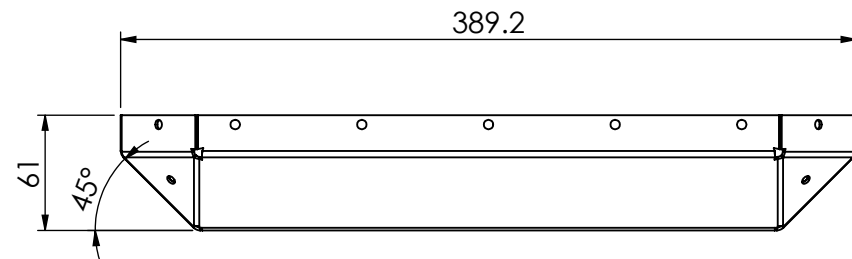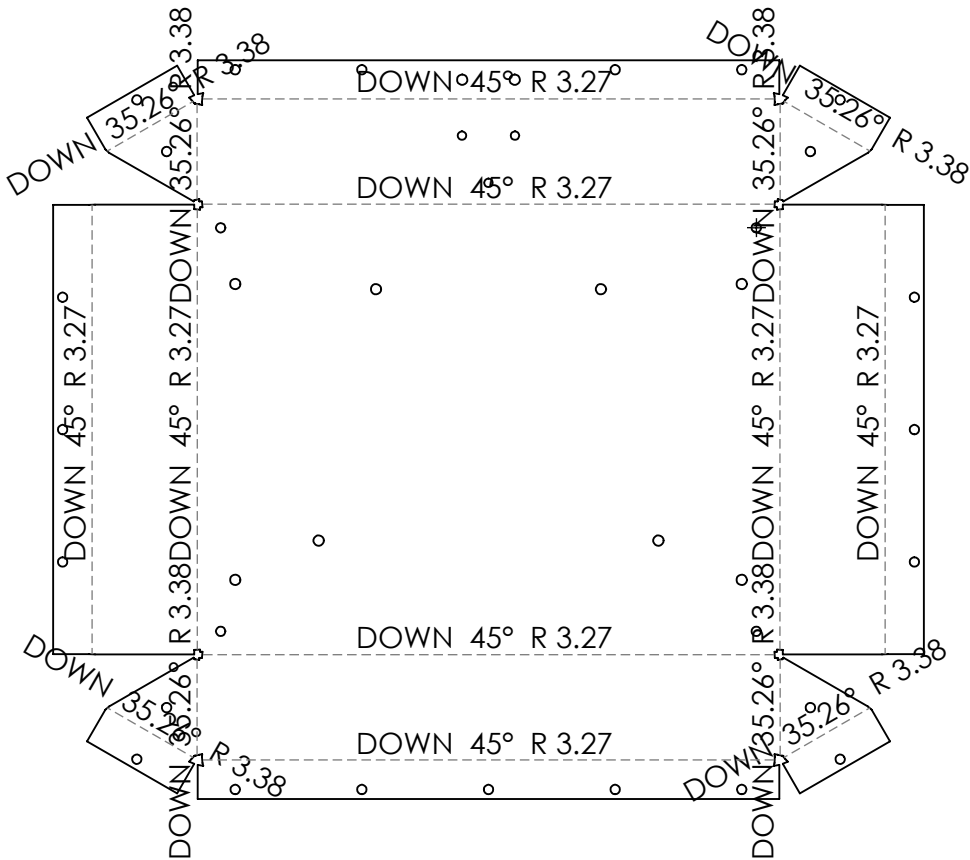





B	ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	P110810002	B
	MACHINING TOLERANCE		GENERAL TOLERANCE										DESCRIPTION:	Top Box Bottom Panel	
	ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE		ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM										DWG No.	P110810002	
	0.5 UP TO 3 ± 0.05	120 UP TO 400 ± 0.2	0.5 UP TO 3 ± 0.1	120 UP TO 400 ± 0.5									DATE PRINTED:	12/05/2025	
	3 UP TO 6 ± 0.05	400 UP TO 1000 ± 0.3	3 UP TO 6 ± 0.1	400 UP TO 1000 ± 0.8									SHEET	8 # 14	
	6 UP TO 30 ± 0.1	1000 UP TO 2000 ± 0.5	6 UP TO 30 ± 0.2	1000 UP TO 2000 ± 1.2									REV	G	
	30 UP TO 120 ± 0.15	2000 UP TO 4000 ± 1.0	30 UP TO 120 ± 0.3	2000 UP TO 4000 ± 2.0									SURFACE TREATMENT:		
	ANGULAR DIMENSIONS		ANGULAR DIMENSIONS												
	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'											
	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'											
50° UP TO 120° ± 0°20'		50° UP TO 120° ± 0°20'													
A	STRAIGHTNESS	CIRCULARITY	PROFILE OF ANY LINE	POSITION	CIRCULAR RUN-OUT	LEAST MATERIAL CONDITION	THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT. 3 PROJECTION METHOD: RD ANGLE		SCALE:	1:5	MATERIAL: ALU1200H4 1.6		 Outlast Adventure		A
	FLATNESS	CYLINDRICITY	PROFILE OF ANY SURFACE	CONCENTRICITY	TOTAL RUN-OUT	MAXIMUM MATERIAL CONDITION			FINISH:	715.88					
	PARALLELISM	PERPENDICULARITY	ANGULARITY	SYMMETRY	ENVELOPE PRINCIPLE	PROJECTED TOLERANCE ZONE									

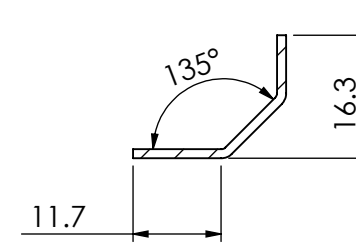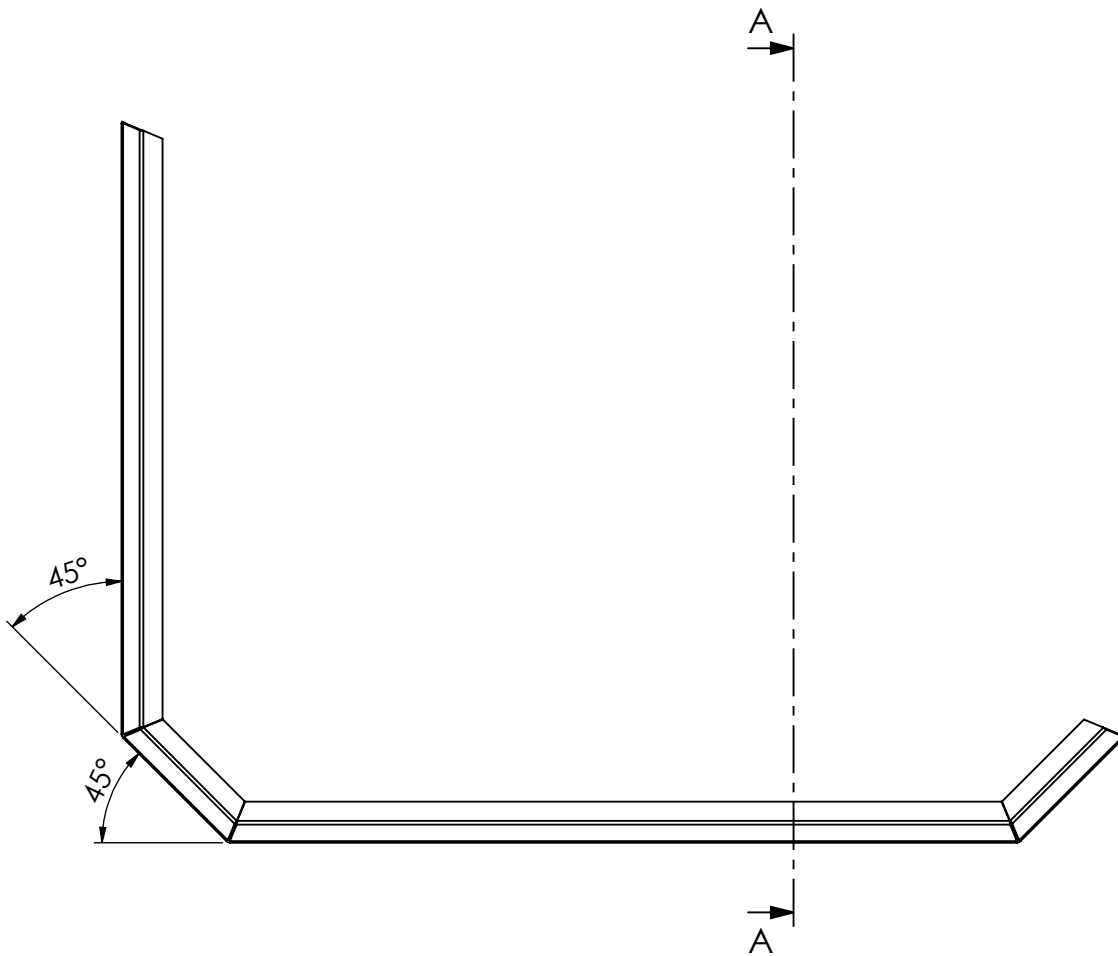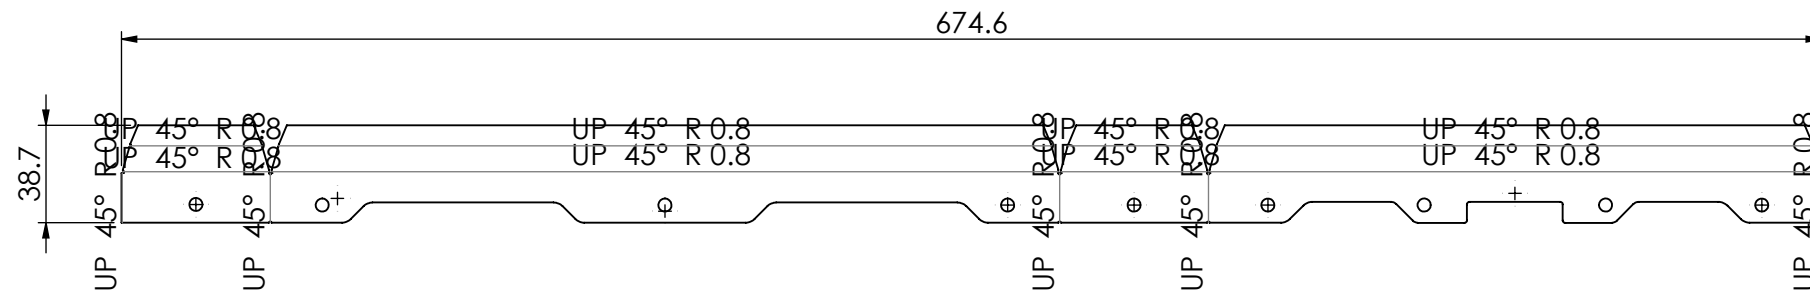

SECTION A-A
SCALE 1 : 1




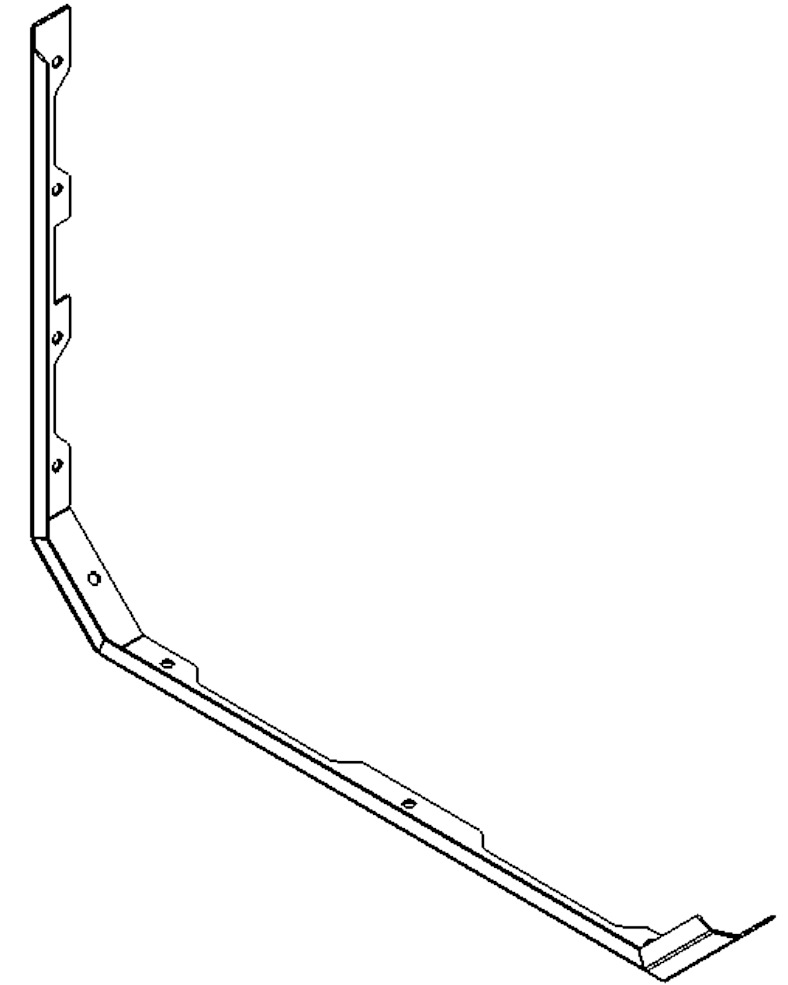



B	ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	P110810003	B	
	MACHINING TOLERANCE		GENERAL TOLERANCE										DESCRIPTION:	Top Box Rim		
	ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE		ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM										DWG No.	P110810003		
	0.5 UP TO 3 ± 0.05	120 UP TO 400 ± 0.2	0.5 UP TO 3 ± 0.1	120 UP TO 400 ± 0.5									DATE PRINTED:	12/05/2025		
	3 UP TO 6 ± 0.05	400 UP TO 1000 ± 0.3	3 UP TO 6 ± 0.1	400 UP TO 1000 ± 0.8									SHEET	9 # 14		
	6 UP TO 30 ± 0.1	1000 UP TO 2000 ± 0.5	6 UP TO 30 ± 0.2	1000 UP TO 2000 ± 1.2									REV	G		
	30 UP TO 120 ± 0.15	2000 UP TO 4000 ± 1.0	30 UP TO 120 ± 0.3	2000 UP TO 4000 ± 2.0									SURFACE TREATMENT:			
	ANGULAR DIMENSIONS		ANGULAR DIMENSIONS													
	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'												
	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'												
50° UP TO 120° ± 0°20'		50° UP TO 120° ± 0°20'														
A	STRAIGHTNESS	CIRCULARITY	PROFILE OF ANY LINE	POSITION	CIRCULAR RUN-OUT	LEAST MATERIAL CONDITION	THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.				3 PROJECTION METHOD: RD ANGLE		SCALE:	1:5	 Outlast Adventure	
	FLATNESS	CYLINDRICITY	PROFILE OF ANY SURFACE	CONCENTRICITY	TOTAL RUN-OUT	MAXIMUM MATERIAL CONDITION							FINISH:	MATERIAL:		
	PARALLELISM	PERPENDICULARITY	ANGULARITY	SYMMETRY	ENVELOPE PRINCIPLE	PROJECTED TOLERANCE ZONE										

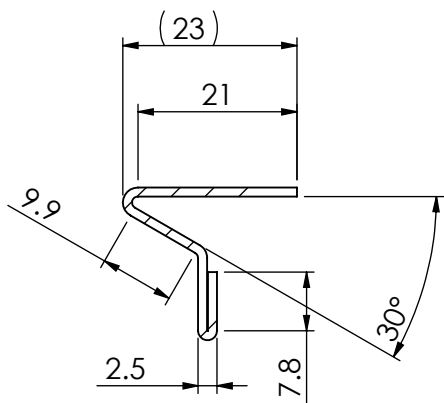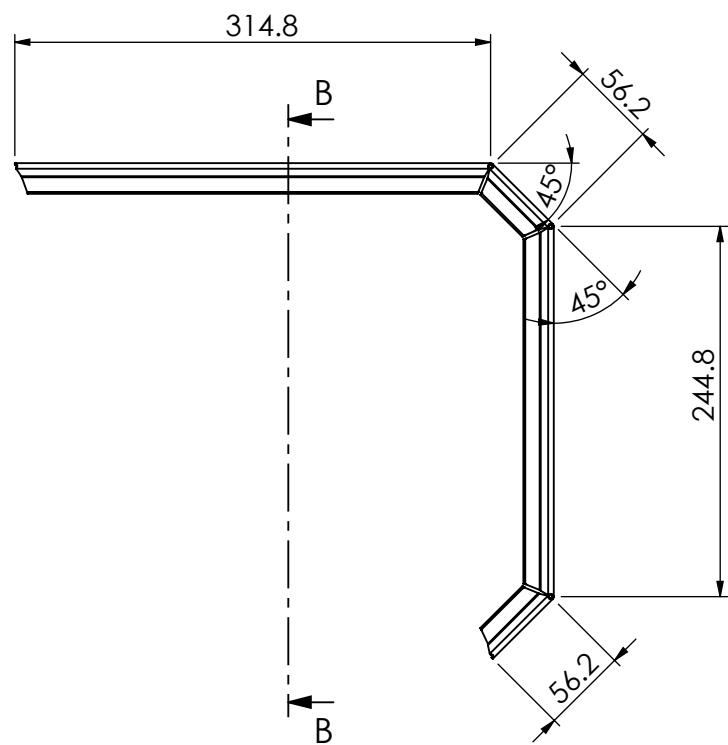
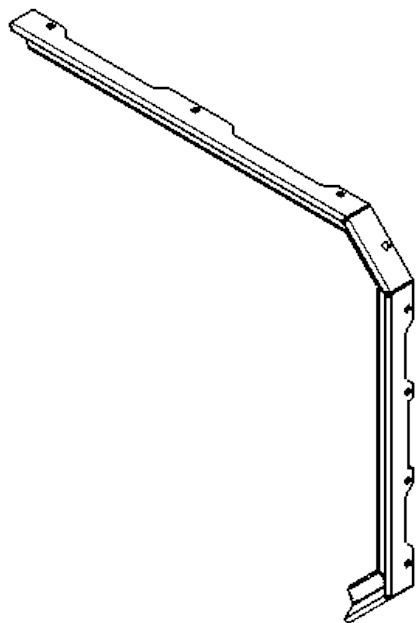
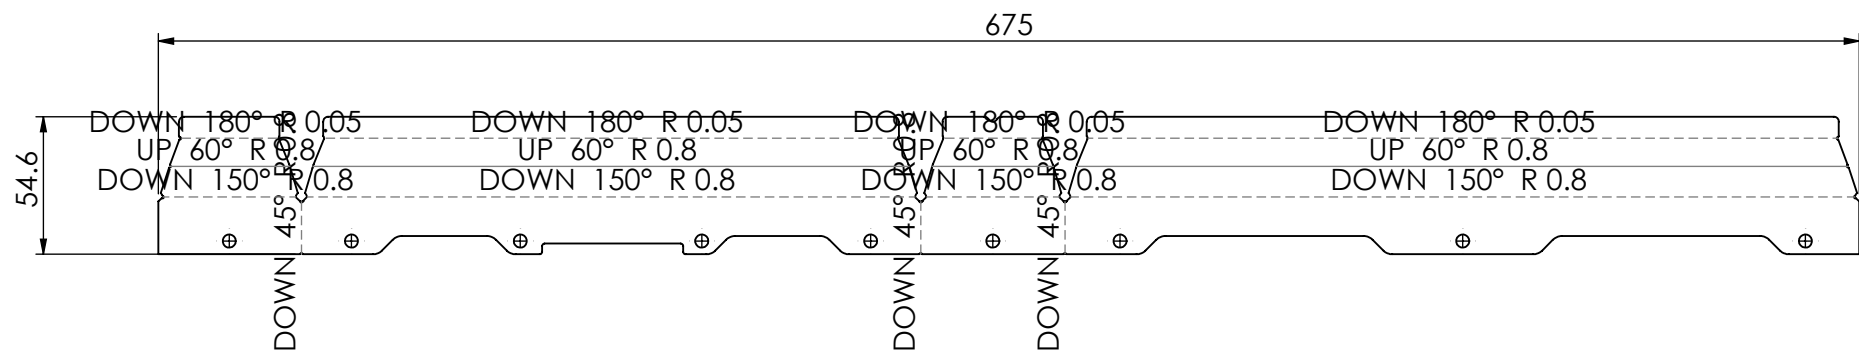



SECTION B-B
SCALE 1 : 1





B	ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	P110810004	B
	MACHINING TOLERANCE		GENERAL TOLERANCE										DESCRIPTION:	Top Box Lid Rim	
	ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE		ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM										DWG No.	P110810004	
	0.5 UP TO 3 ± 0.05	120 UP TO 400 ± 0.2	0.5 UP TO 3 ± 0.1	120 UP TO 400 ± 0.5									DATE PRINTED:	12/05/2025	
	3 UP TO 6 ± 0.05	400 UP TO 1000 ± 0.3	3 UP TO 6 ± 0.1	400 UP TO 1000 ± 0.8									SHEET	10# 14	
	6 UP TO 30 ± 0.1	1000 UP TO 2000 ± 0.5	6 UP TO 30 ± 0.2	1000 UP TO 2000 ± 1.2									REV	H	
	30 UP TO 120 ± 0.15	2000 UP TO 4000 ± 1.0	30 UP TO 120 ± 0.3	2000 UP TO 4000 ± 2.0									SURFACE TREATMENT:		
	ANGULAR DIMENSIONS		ANGULAR DIMENSIONS												
	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'											
	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'											
A	50° UP TO 120° ± 0°20'		50° UP TO 120° ± 0°20'												A
	 STRAIGHTNESS	 CIRCULARITY	 PROFILE OF ANY LINE	 POSITION	 CIRCULAR RUN-OUT	 LEAST MATERIAL CONDITION	THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES PTY LTD ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT. 3 PROJECTION METHOD: RD ANGLE 				SCALE:	1:5			
	 FLATNESS	 CYLINDRICITY	 PROFILE OF ANY SURFACE	 CONCENTRICITY	 TOTAL RUN-OUT	 MAXIMUM MATERIAL CONDITION					FINISH:		MATERIAL:		
	 PARALLELISM	 PERPENDICULARITY	 ANGULARITY	 SYMMETRY	 ENVELOPE PRINCIPLE	 PROJECTED TOLERANCE ZONE							SS304 1.2		
											 Outlast Adventure				

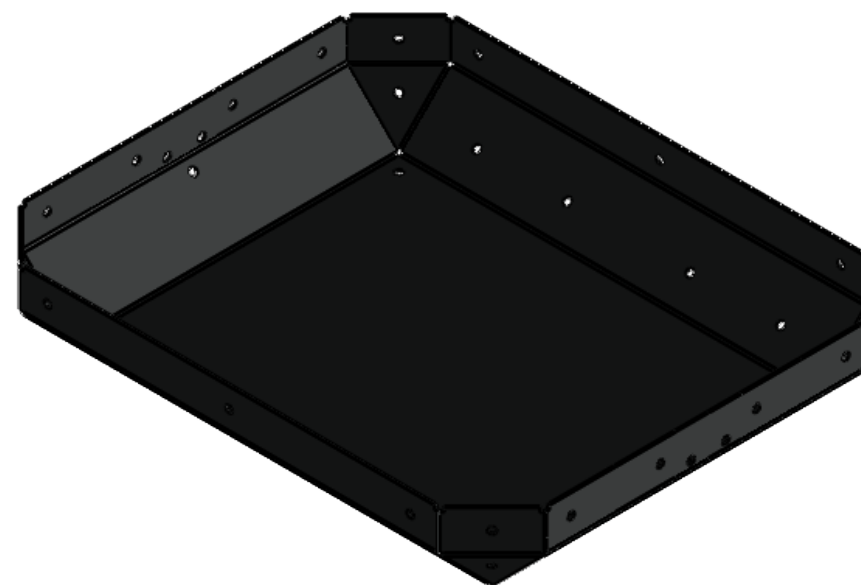
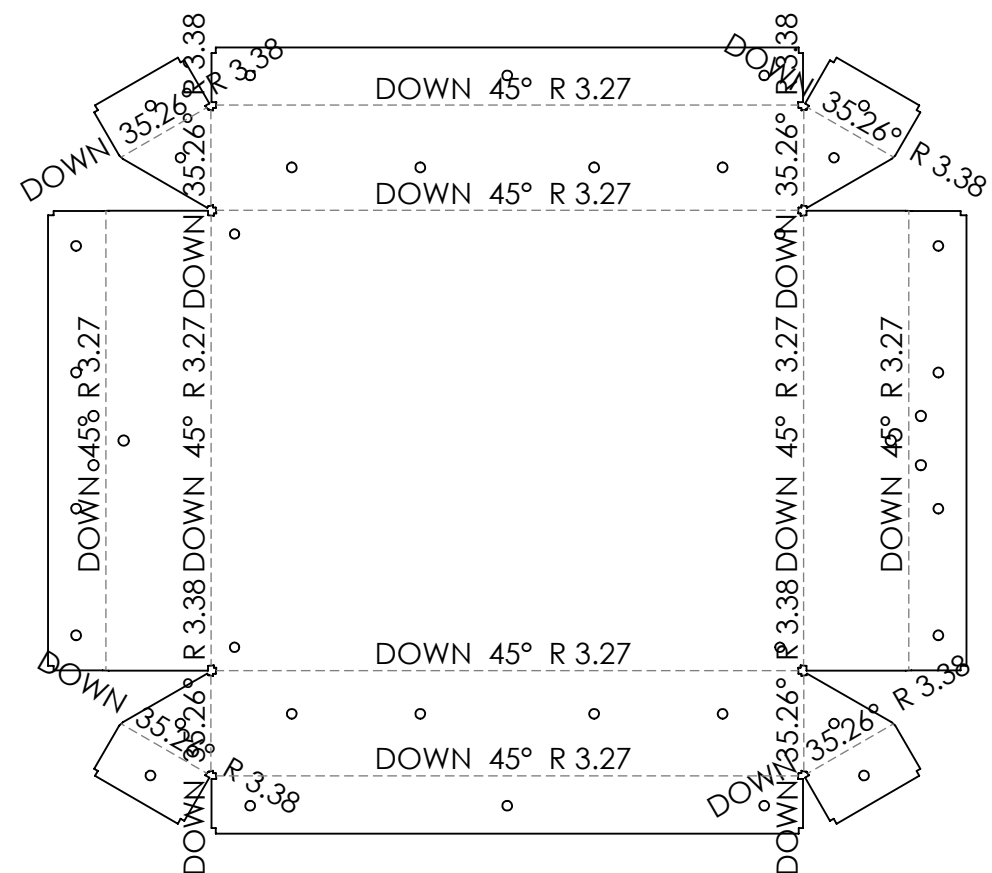


B	ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	P110810005	B							
										DRAWN:			DESCRIPTION:	Top Box Lid Plate								
	MACHINING TOLERANCE		GENERAL TOLERANCE							CHECKED:			DWG No.									
	ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE		ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM							APPROVED:			DATE PRINTED:	12/05/2025								
	0.5 UP TO 3 ± 0.05	120 UP TO 400 ± 0.2	0.5 UP TO 3 ± 0.1	120 UP TO 400 ± 0.5						MFG:			SHEET	11# 14								
	3 UP TO 6 ± 0.05	400 UP TO 1000 ± 0.3	3 UP TO 6 ± 0.1	400 UP TO 1000 ± 0.8						QA:			REV									
	6 UP TO 30 ± 0.1	1000 UP TO 2000 ± 0.5	6 UP TO 30 ± 0.2	1000 UP TO 2000 ± 1.2									SURFACE TREATMENT:									
	30 UP TO 120 ± 0.15	2000 UP TO 4000 ± 1.0	30 UP TO 120 ± 0.3	2000 UP TO 4000 ± 2.0																		
	ANGULAR DIMENSIONS		ANGULAR DIMENSIONS																			
	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'																		
A	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'											A							
	50° UP TO 120° ± 0°20'		50° UP TO 120° ± 0°20'																			
	☐ STRAIGHTNESS	☐ CIRCULARITY	☐ PROFILE OF ANY LINE	☒ POSITION	☐ CIRCULAR RUN-OUT	☐ LEAST MATERIAL CONDITION	THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT from BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.		3 PROJECTION METHOD: RD ANGLE 	SCALE:	1:5											
	☐ FLATNESS	☐ CYLINDRICITY	☐ PROFILE OF ANY SURFACE	☐ CONCENTRICITY	☐ TOTAL RUN-OUT	☐ MAXIMUM MATERIAL CONDITION				FINISH:	MATERIAL:											
	☐ PARALLELISM	☐ PERPENDICULARITY	☐ ANGULARITY	☐ SYMMETRY	☐ ENVELOPE PRINCIPLE	☐ PROJECTED TOLERANCE ZONE				ALU1200H4 1.6												
					2	3				4				5				6				

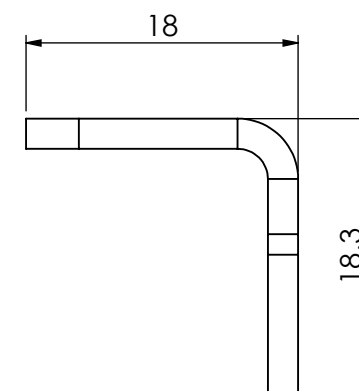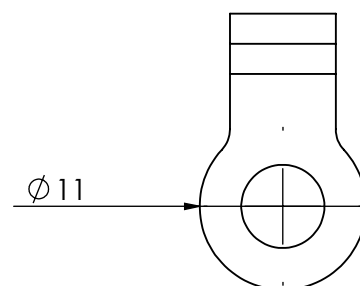

B	ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	P110810006	B			
	MACHINING TOLERANCE		GENERAL TOLERANCE						DRAWN:				DESCRIPTION:	Lid Cable Mount Fixed				
	ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE		ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM						CHECKED:				DWG No.	P110810006				
	0.5 UP TO 3 ± 0.05	120 UP TO 400 ± 0.2	0.5 UP TO 3 ± 0.1	120 UP TO 400 ± 0.5					APPROVED:				DATE PRINTED:	12/05/2025				
	3 UP TO 6 ± 0.05	400 UP TO 1000 ± 0.3	3 UP TO 6 ± 0.1	400 UP TO 1000 ± 0.8					MFG:				SHEET	12# 14				
	6 UP TO 30 ± 0.1	1000 UP TO 2000 ± 0.5	6 UP TO 30 ± 0.2	1000 UP TO 2000 ± 1.2					QA:				REV	H				
	30 UP TO 120 ± 0.15	2000 UP TO 4000 ± 1.0	30 UP TO 120 ± 0.3	2000 UP TO 4000 ± 2.0									SURFACE TREATMENT:					
	ANGULAR DIMENSIONS		ANGULAR DIMENSIONS															
	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'	UP TO 10° ± 1°	120° UP TO 400° ± 0°10'														
	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'	10° UP TO 50° ± 0°30'	OVER 400° ± 0°5'														
50° UP TO 120° ± 0°20'		50° UP TO 120° ± 0°20'																
A	☐ STRAIGHTNESS	☐ CIRCULARITY	☒ PROFILE OF ANY LINE	☒ POSITION	☐ CIRCULAR RUN-OUT	☐ LEAST MATERIAL CONDITION	THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRACTION OF THIS WARNING CONSTITUTES THEFT.	3 PROJECTION METHOD: RD ANGLE		SCALE:	1:5	MATERIAL: SS304 2	 Outlast Adventure	A				
	☐ FLATNESS	☒ CYLINDRICITY	☐ PROFILE OF ANY SURFACE	☐ CONCENTRICITY	☐ TOTAL RUN-OUT	☐ MAXIMUM MATERIAL CONDITION												
	☒ PARALLELISM	☐ PERPENDICULARITY	☐ ANGULARITY	☐ SYMMETRY	☐ ENVELOPE PRINCIPLE	☐ PROJECTED TOLERANCE ZONE												
	1		2		3					4					5		6	

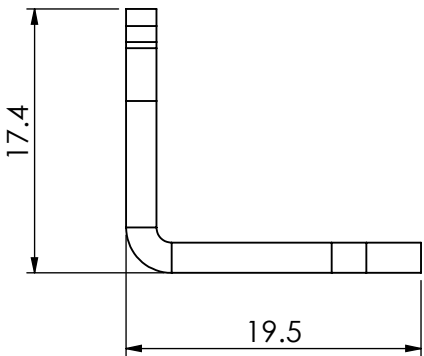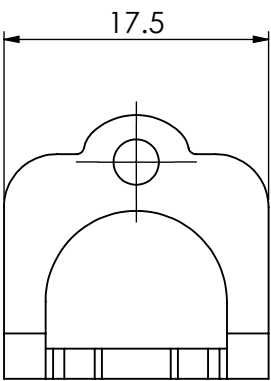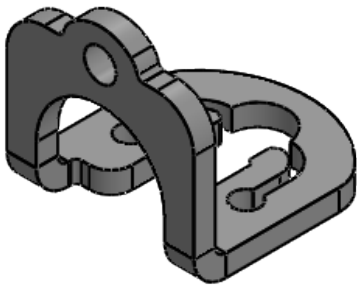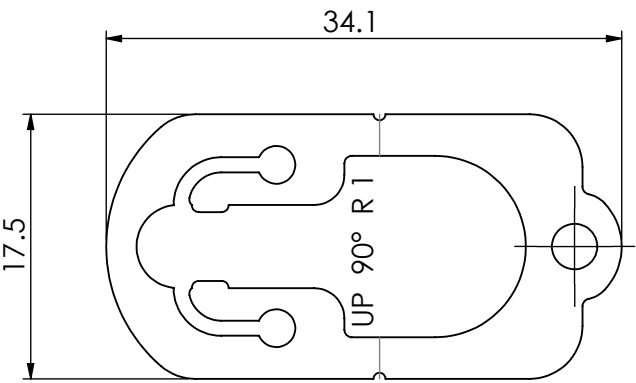

ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.				REV	Detail of REV	Date:	Name:		Name:	Signature:	Date:	FILE NAME:	P110810007		
								DRAWN:				DESCRIPTION:	Lid Cable Mount Removable		
MACHINING TOLERANCE				GENERAL TOLERANCE								DWG No.	P110810007		
ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE				ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: MEDIUM								DATE PRINTED:	12/05/2025		
0.5 UP TO 3 ± 0.05		120 UP TO 400 ± 0.2		0.5 UP TO 3 ± 0.1		120 UP TO 400 ± 0.5						SHEET	13# 14		
3 UP TO 6 ± 0.05		400 UP TO 1000 ± 0.3		3 UP TO 6 ± 0.1		400 UP TO 1000 ± 0.8						REV	H		
6 UP TO 30 ± 0.1		1000 UP TO 2000 ± 0.5		6 UP TO 30 ± 0.2		1000 UP TO 2000 ± 1.2						SURFACE TREATMENT:			
30 UP TO 120 ± 0.15		2000 UP TO 4000 ± 1.0		30 UP TO 120 ± 0.3		2000 UP TO 4000 ± 2.0						 Outlast Adventure			
ANGULAR DIMENSIONS				ANGULAR DIMENSIONS											
UP TO 10° ± 1°		120° UP TO 400° ± 0°10'		UP TO 10° ± 1°		120° UP TO 400° ± 0°10'									
10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'		10° UP TO 50° ± 0°30'		OVER 400° ± 0°5'									
50° UP TO 120° ± 0°20'				50° UP TO 120° ± 0°20'											
 STRAIGHTNESS	 CIRCULARITY	 PROFILE OF ANY LINE	 POSITION	 CIRCULAR RUN-OUT	 LEAST MATERIAL CONDITION	3 PROJECTION METHOD: RD ANGLE 				SCALE:	1:5	MATERIAL: SS304 2			
 FLATNESS	 CYLINDRICITY	 PROFILE OF ANY SURFACE	 CONCENTRICITY	 TOTAL RUN-OUT	 MAXIMUM MATERIAL CONDITION					FINISH:					
 PARALLELISM	 PERPENDICULARITY	 ANGULARITY	 SYMMETRY	 ENVELOPE PRINCIPLE	 PROJECTED TOLERANCE ZONE										
THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.															

