
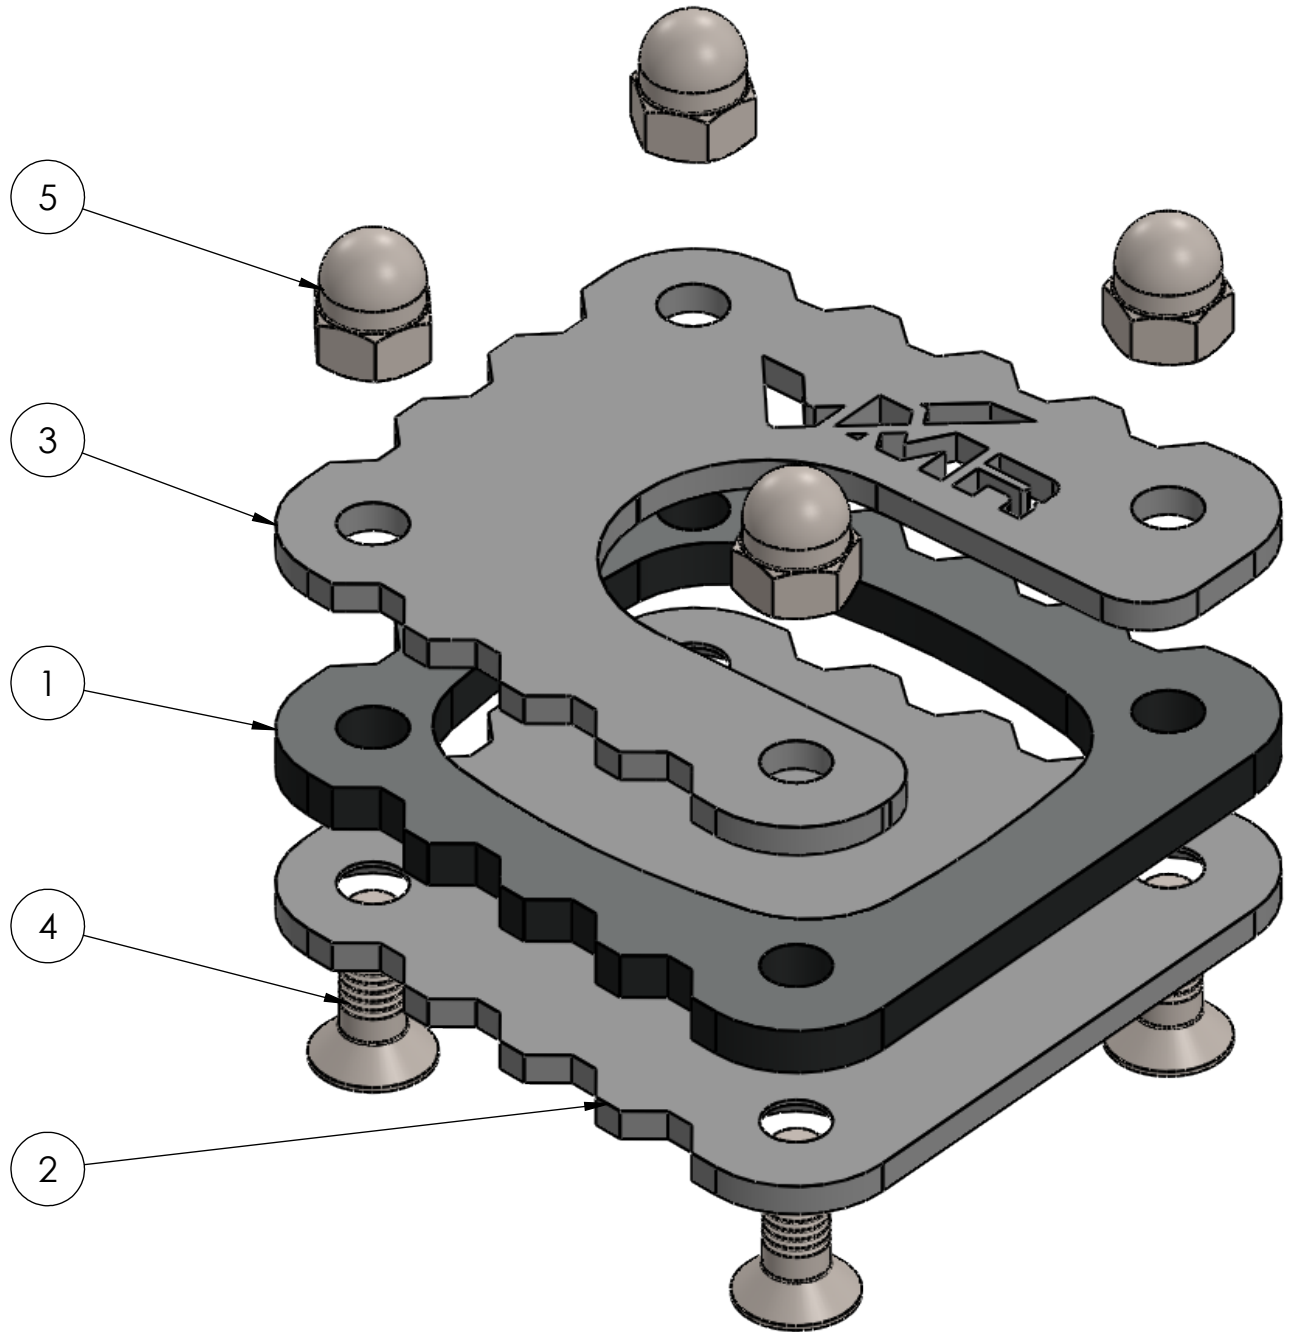
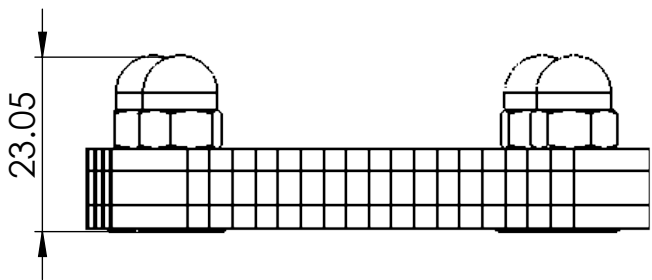


ITEM NO.	PART NUMBER	DESCRIPTION	Material	Stocksize	QTY.
1	P040730001	Honda NC750 Side Stand Extender P1	ALU1200H4	4.5	1
2	P040730002	Honda NC750 Side Stand Extender P2	SS304	3	1
3	P040730003	Honda NC750 Side Stand Extender P3	SS304	3	1
4	WFST-D912SS-M06x016	Hexagon Socket Countersunk Head Cap Screw SS -M06x016			4
5	WFST-D1587-M06	Domed Cap Nut Chromed - M06			4

Process	Time (Min)
Laser Cut	
Countersinking	10
Powdercoating - Black Ferrograin-Vx8503	0.0042m^2
Shaking	30
Parts Picking	10
Assembly	10
Packaging	10

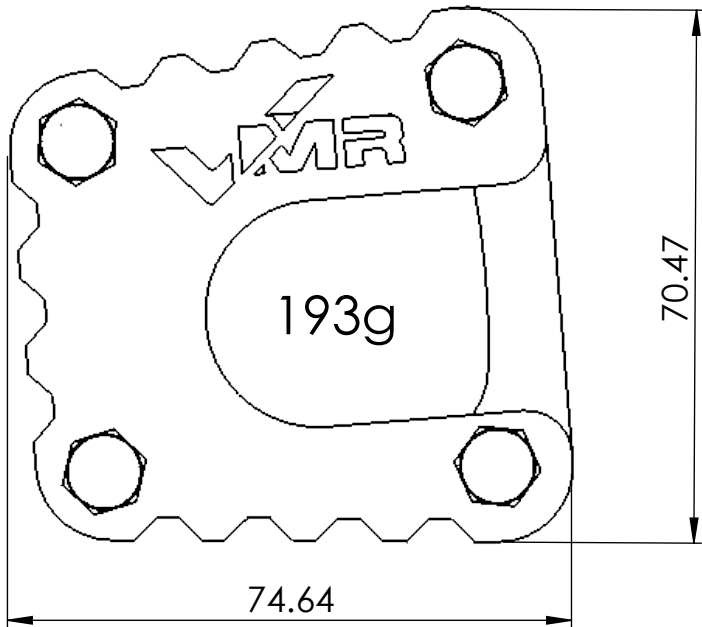

ALL METRIC THREAD TOL: TO 6H (INTERNAL) AND 6g (EXTERNAL) U.O.S REMOVE ALL SHARP EDGES WHERE APPLICABLE.						REV	Detail of REV	Date:	Name:	Name:	Signature:	Date:	FILE NAME:	A040730			
MACHINING TOLERANCE ISO 2780-1 U.O.S LINEAR DIMENSIONS CLASS: FINE 0.5 UP TO 3 ± 0.05120 UP TO 400 ± 0.23 UP TO 6 ± 0.05400 UP TO 1000 ± 0.36 UP TO 30 ± 0.11000 UP TO 2000 ± 0.530 UP TO 120 ± 0.152000 UP TO 4000 ± 1.0 ANGULAR DIMENSIONS UP TO 10° ± 1°120° UP TO 400° ± 0°10'10° UP TO 50° ± 0°30'OVER 400° ± 0°5'50° UP TO 120° ± 0°20'										DRAWN:				DESCRIPTION:	Honda NC750 Side Stand Extender		
										CHECKED:				DWG No.			
										APPROVED:				DATE PRINTED:	03/06/2022		
										MFG:				SHEET	1 # 3		
										QA:				REV	B		
— STRAIGHTNESS ▭ FLATNESS ∥ PARALLELISM ○ CIRCULARITY ⊘ CYLINDRICITY ⊥ PERPENDICULARITY ⌒ PROFILE OF ANY LINE ⌒ PROFILE OF ANY SURFACE ∠ ANGULARITY ⊕ POSITION ◎ CONCENTRICITY ≡ SYMMETRY ↗ CIRCULAR RUN-OUT ↗ TOTAL RUN-OUT Ⓢ ENVELOPE PRINCIPLE Ⓛ LEAST MATERIAL CONDITION Ⓜ MAXIMUM MATERIAL CONDITION Ⓟ PROJECTED TOLERANCE ZONE																 Outlast Adventure	
						THIS DRAWING IS THE PROPERTY OF BRIGHTWING TECHNOLOGIES PTY LTD AND MAY NOT BE COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WHATSOEVER WITHOUT THE WRITTEN CONSENT FROM BRIGHTWING TECHNOLOGIES Pty Ltd ANY INFRINGEMENT OF THIS WARNING CONSTITUTES THEFT.				3 PROJECTION METHOD: RD ANGLE 		SCALE:	1:1				
												FINISH:		MATERIAL:			